

WS200-P Weatherproof Extension Speaker

Thank you for purchasing this V-Tronix product. V-Tronix works hard to build reliability and durability into all of its products for maximum customer satisfaction. ***Before installing, please read all instructions, study the diagram and check parts supplied against those listed.***

The WS200-P is a Weatherproof extension loudspeaker for 4 or 8 Ohm systems

Tools Required: Knife, Soldering Iron, Drill 3.2mm bit, screwdriver

Installation Instructions

The speaker can be stirrup mounted using the bracket provided or it can be flush mounted by removing the bracket and fixing the speaker into a 116mm hole cut into the bulkhead.

When FLUSH MOUNTED remove the four rubber bungs around the rim of the speaker and use those holes as fixing holes. Fit the gasket provided behind the speaker flanges to make a weatherproof seal.

Everyone requires a different length of speaker wire so we have provided a short length of wire, enough to reach into a dry area. From here you can make a connection using the wire of your choice to reach the radio-telephone.

Impedance: 8 ohms (suitable for 4 ohm use)

Power: 5 Watts

COMPASS SAFE DISTANCE:


1.0m for a 2 degree deviation, 1.3m for a 1 degree deviation (ship's steering compass)

2.0m for a 0.25 degree deviation (ship's standard compass)

Technical Tip: You can connect the wires either way round. You must ensure there is no short circuit between the two wires as this will stop the speaker from working.

Supplied Parts:

- WS200-P Speaker
- 6 x No.8, 3/4" screws
- Flush mounting Gasket
- Sealing Grommets
- Bracket

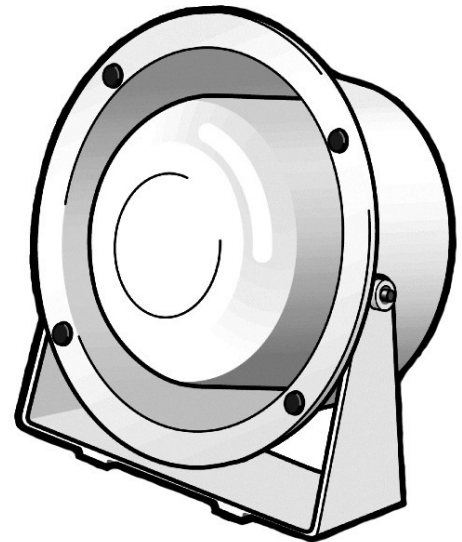

Shakespeare®

Electronic Products Group

www.vtronix-antennas.com
www.shakespeare-marine.com

EUROPEAN OPERATIONS: Fleetwood Lancashire, FY7 8RY, England
U.S. OPERATIONS: Columbia, SC 29223, U.S.A.

JARDEN
applied materials
a division of Jarden Process Solutions